

RAPID TILL HD

STRIP TILL SYSTEM



 **SCHLAGEL**
FOR FARMERS  BY FARMERS

RAPID TILL HD

EXCELS AT HANDLING HIGH-RESIDUE SITUATIONS

The Rapid Till HD is our heavy-duty strip till unit for farming in tough, high-residue conditions. Its design allows trash to flow through the row unit components with minimal disturbance and minimal plugging.

BENEFITS

In place of the standard shear bolt, a hydraulic reset is available. This automatically resets the shank after it clears an obstruction, without any effort from the operator.

DESIGNED FOR


Reduced Tillage

UNIQUE FEATURES

It's easy to adjust the machine to get the job done exactly the way you want. Adjust the down-pressure by moving one pin; the front coulter depth by moving one bolt; and the wavy coulters and rear packer by moving a single pin.

IDEAL CROPS

Any Row Crop

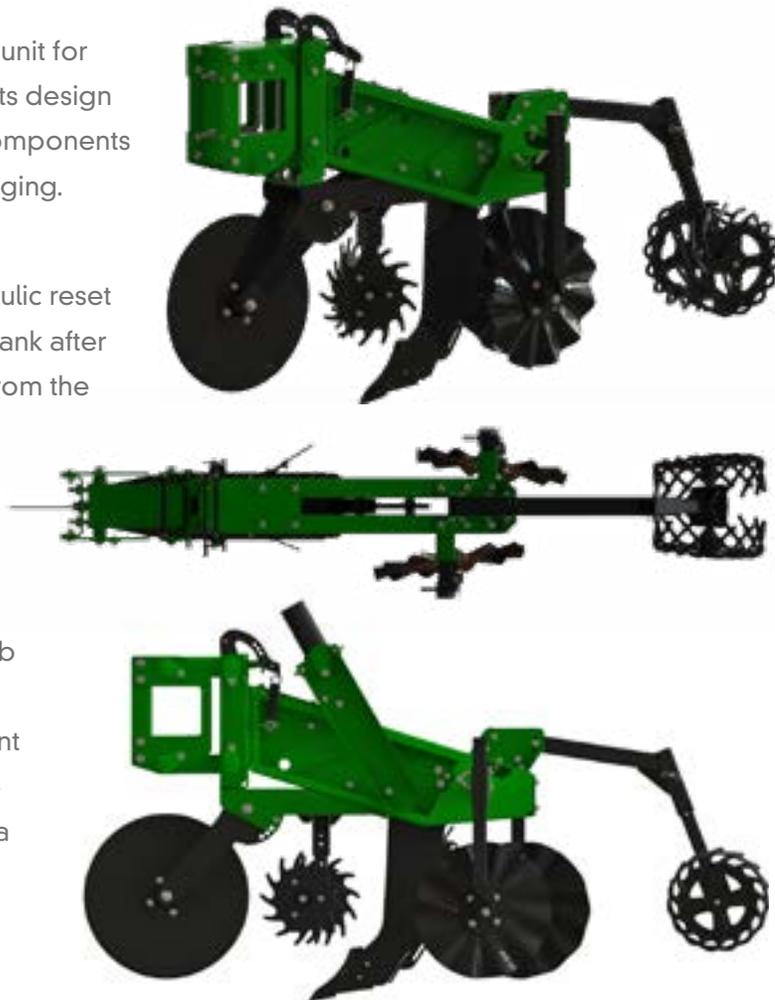

SPECS COMPONENTS

There are four key components to the row unit: A flat coultter, built-in row cleaners with a semi-parabolic shank, wavy coultters, and a dual-wheel packer.

The row unit starts with a flat coultter to cut residue and built-in row cleaners to move residue in front of the 3/4" thick semi-parabolic shank. The shank can be adjusted to till from 6-16" deep. Both this shank and the point are designed to prevent soil from slabbing up in big chunks.

Behind the shanks, two wavy coultters lift and pinch the soil together. This closes the void left by the shank and removes any air pockets in the seed bed.

The final component of the row unit is the dual-wheel packer, which acts as a "depth gauge wheel" for the row unit. This packer firms the soil, reducing moisture evaporation and breaking up any dirt clods that can impede seed placement and seed-to-soil contact.



SPECS

Standard equipment options include:

- 24" flat coultter
- Built-in row cleaners
- 3/4" semi-parabolic shank with 6" point
- Two 20" wavy coultters
- 16" dual-wheel light packer

- 25HP average per row is recommended; actual requirements will vary with options and soil conditions.

OPTIONS

- 4 to 16 row machine
- 20" row spacing (up to 40" row spacing to accommodate your equipment)



 **SCHLAGEL**

Our products are simple, yet stalwart, and they're built and tested to ensure they'll be in it for the long haul. Visit our website to locate a trusted Schlagel dealer near you. Have questions? Just give us a call!

www.schlagel.net

1.888.889.1504

